
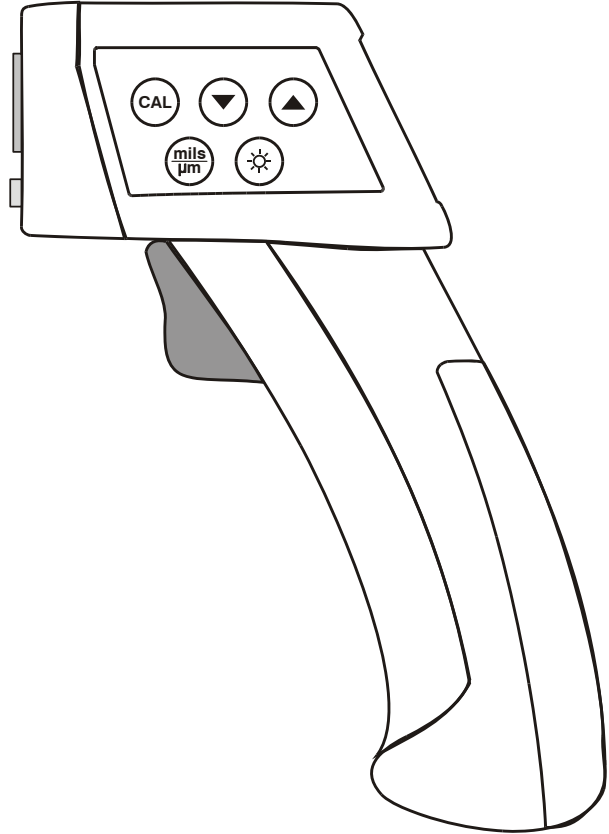


COATING THICKNESS GAUGE GUN-TYPE MODEL: 113

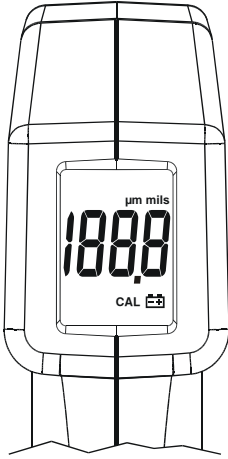

FEATURES:

- 2-point calibration.
- Portability and simplicity one hand operation.
- Display Back-Light feature.
- μm/mils user-selective.
- Auto power off function.
- CE-Mark Approval.
- For the ferrous material use.

SPECIFICATIONS

Display: 3 1/2 digit liquid crystal display (LCD) with a maximum reading of 1999.

Low battery indication: The "⚡" is displayed when the battery voltage drops below the operating level.

Operating environment: 0°C to 50°C at <75% R.H.

Storage temperature: -20°C to 60°C, 0 to 80% R.H. with battery removed from meter.

Accuracy: Stated accuracy at 23°C±5°C, <75% R.H.

Auto power off: 15 seconds

Dimensions: 148mm(H) x 105mm(W) x 42mm(D).

TECHNICAL DATA

Range: 0 to 40.0mils (0 to 1000μm)

Resolution: 0.1mils/1μm

Response Time: 1 second

Accuracy:

±(4dgts) on 0 to 7.8mils

±(7dgts) on 0 to 199μm

±(3%+4dgts) on 7.9mils to 40mils

200μm to 1000μm

CHY FIREMATE CO., LTD.

NO.3, SHENGLI 1st ST., XINTIAN VILLAGE,
RENDE DISTRICT, TAINAN CITY, TAIWAN R.O.C.

TEL: 886-6-2794811 FAX: 886-6-2700227

E-mail: chy@chy-meter.com