
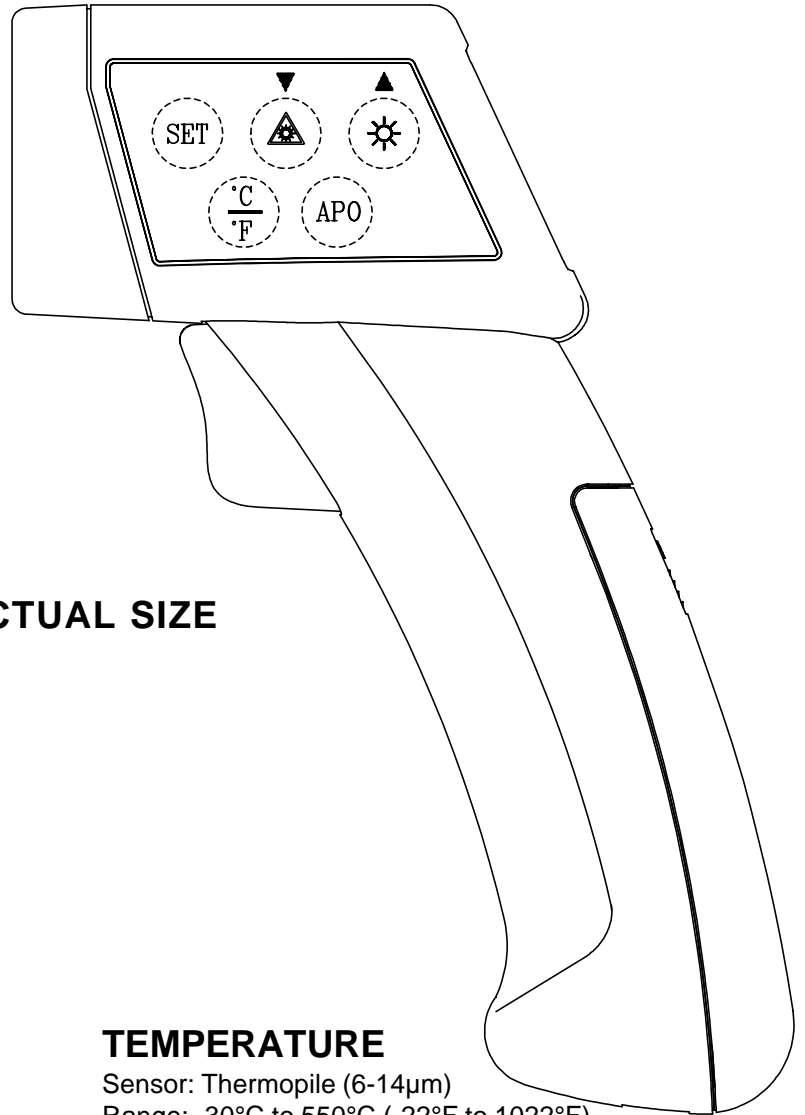


# INFRARED THERMOMETER WITH LASER MARKER GUN-TYPE MODEL: 111

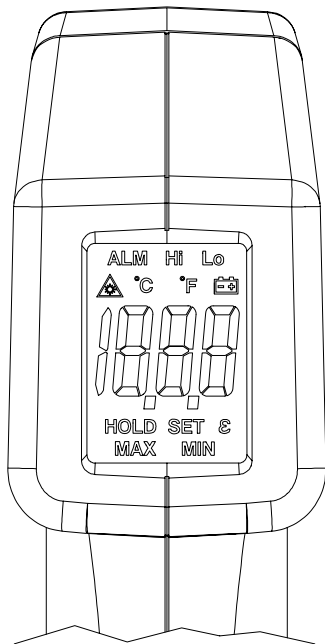


**ACTUAL SIZE**

## FEATURES:

- Portability and simplicity one hand operation.
- Display Back-Light feature.
- Auto DATA HOLD function after releasing MEASURE Button.
- °C/°F user-selective.
- With MAX,MIN record function.
- With SET,Hi,Lo limits beeper function.
- Adjustable emissivity ( $\epsilon$ ) 0.1 to 1.00.
- Auto power off function.
- Use thermopile detection sensor(6-14 $\mu$ m).
- CE-Mark Approval.


## SPECIFICATIONS

- Display: 3 1/2 digit liquid crystal display (LCD) with a maximum reading of 1999.
- Polarity: Automatic, positive implied, negative polarity indication.
- Low battery indication: the "  " is displayed when the battery voltage drops below the operating level.
- Operating environment: 0°C to 50°C at <75% relative humidity.
- Storage temperature: -20°C to 60°C, 0 to 80% R.H.with battery removed from meter.
- Accuracy: Stated accuracy at 23°C $\pm$ 5°C, <75% relative humidity.
- Auto power off : 10 seconds
- Dimensions: 148mm(H) x 105mm(W) x 42mm(D).

## TEMPERATURE

- Sensor: Thermopile (6-14 $\mu$ m)
- Range: -30°C to 550°C (-22°F to 1022°F)
- Resolution: 0.5 / 1 °C (auto), 1°F
- Response Time: 0.25 second
- Accuracy:  $\pm$ (2°C/4°F) on -30°C to 100°C (-22°F to 212°F)
- $\pm$ (2% reading) on 101°C to 550°C (213°F to 1022°F)

- Emissivity ( $\epsilon$ ): 0.1 to 1.0
- Field of View: 100mm $\phi$  at 1000mm
- Laser Specifications:
- Laser safety classification of Class 2
- Wave Length: Red (630-670nm).
- Power out: <1mW , class 2 laser product.

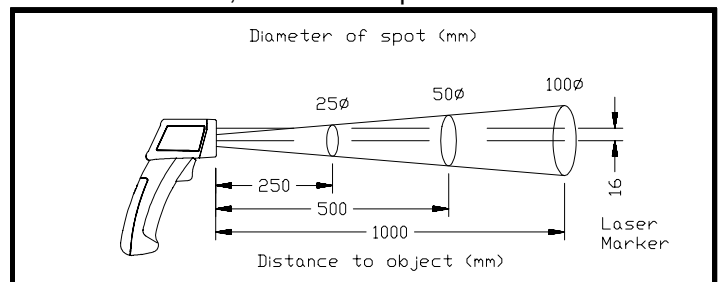

**Spot size increases with distance from the probe tip as shown**

## CHY FIREMATE CO., LTD.

NO.3, SHENGLI 1<sup>ST</sup> ST., XINTIAN VILLAGE, RENDE DISTRICT, TAINAN CITY, TAIWAN R.O.C.  
TEL: 886-6-2794811 FAX: 886-6-2700227  
E-mail: [chy@chy-meter.com](mailto:chy@chy-meter.com)