


MANOMETER

MODEL: 380

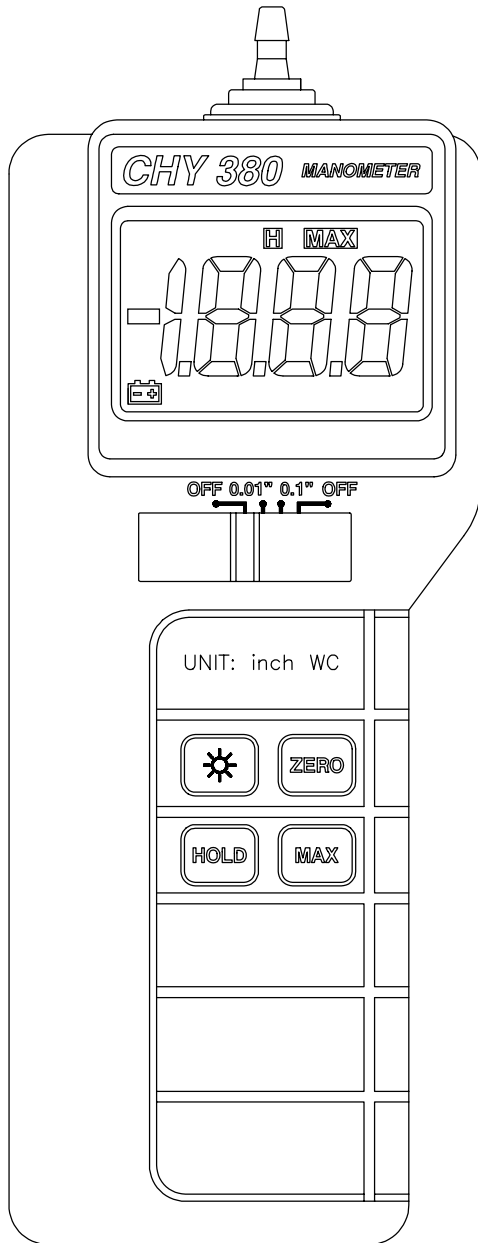

FEATURES:

- CE-Mark Approval.
- Portability and simplicity one hand operation.
- Display Back-Light feature.
- With MAX/DATA HOLD function.
- Hand-Held lightweight design.
- User-selective resolution 0.01"/0.1" WC.

SPECIFICATIONS

- Display: 3¹/₂ digit liquid crystal display (LCD) with a maximum reading of 1999.
- Polarity: Automatic, positive implied, negative polarity indication.
- Low battery indication: the "🔋" is displayed when the battery voltage drops below the operating level.
- Measurement rate: 2.5 times.
- Operating environment: 0°C to 50°C at <70% relative humidity.
- Storage temperature: -20°C to 60°C, 0 to 80% R.H. with battery removed from meter.
- Accuracy: Stated accuracy at 23°C ± 5°C, <75% relative humidity.
- Dimensions: 173.5mm(H) x 65.5mm(W) x 35mm(D).
- Weight: 178g (including batteries)

MANOMETER

- Sensor: Solid State
- Range: 0-140" water column
- Accuracy: ±2.0% full scale
- Resolution: 0.01" / 0.1"
- Operating Temperature: 32 to 105 °F
- Operating relative humidity : 15 to 90%RH, non-condensing

CHY FIREMATE CO., LTD.

NO.3, SHENGLI 1ST ST., XINTIAN VILLAGE, RENDE DISTRICT, TAINAN CITY, TAIWAN R.O.C.

TEL: 886-6-2794811 FAX: 886-6-2700227

E-mail: chy@chy-meter.com