


RPM METER


MODEL: 250

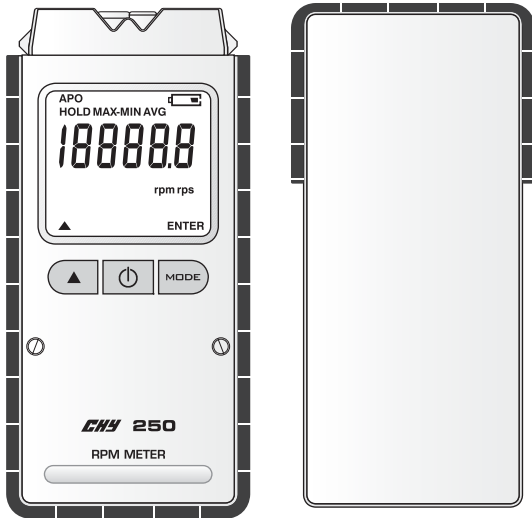

FEATURES

Optical RPM Measurement.
MAX/MIN/AVG and HOLD functions.
Auto-power off.
Backlight function.
Self-adhesive reflective tape.
Protective cap for safe storage.
Attached with carrying strap.

Storage temperature: -20°C to 60°C, 0 to 80% R.H. with battery removed from meter.

Low battery indication: The “” is displayed when the battery voltage drops below the operating level.

Battery: 1.5Vx2pcs AAA size.

Dimensions: 24.7mm(T)x50.9mm(W)x 132.9mm(H).

Weight: Approx. 110g including batteries.

SPECIFICATION

Operating environment: 0°C to 50°C at <70% R.H.

Measuring range: 100.0 to 99999 rpm

Resolution:

0.1 rpm(100.0 to 19999.9 rpm)

1 rpm(20000 to 99999 rpm)

Accuracy: Stated accuracy at 23°C±5°C, <75% R.H.

±0.02% of reading + 1dgt

Units: rpm, rps

Measurement rate: 1 time/second.

Temperature Coefficient: 0.1 times the applicable accuracy specification per °C out of 18°C to 28°C(64°F to 82°F).

CHY FIREMATE CO., LTD.

NO.3, SHENGLI 1st ST., XINTIAN VILLAGE,
RENDE DISTRICT, TAINAN CITY, TAIWAN R.O.C.

TEL: 886-6-2794811 FAX: 886-6-2700227

E-mail: chy@chy-meter.com