
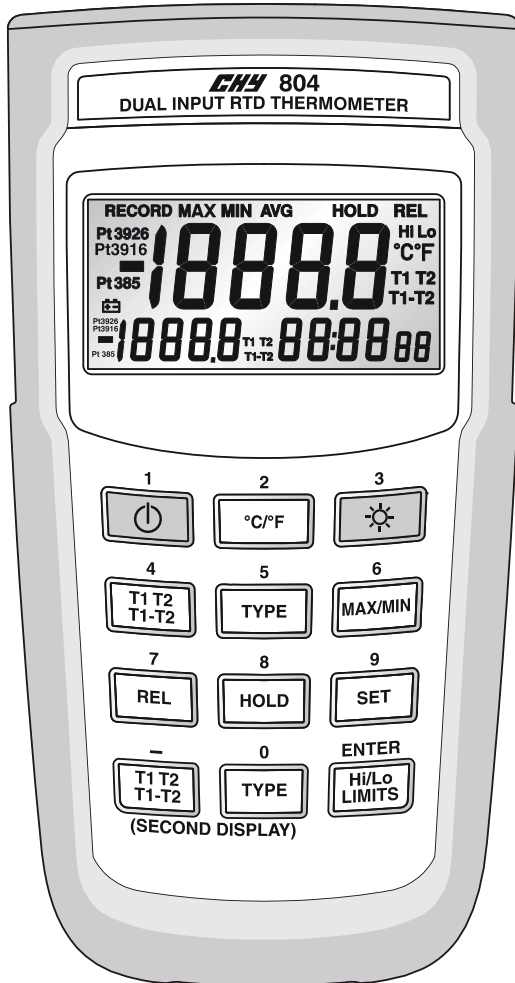


DUAL INPUT RTD THERMOMETER

MODEL: 804

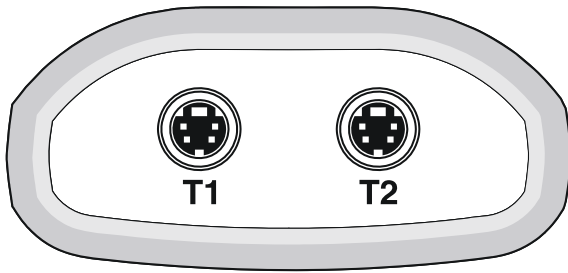

FEATURES:

Dual input function.
 Pt3916/Pt3926/Pt385 RTD standard.
 MAX/MIN with elapsed time, AVG, REL, HOLD function.
 Warning beeper with Hi/Lo setting.
 Time setting, REL setting.
 According to temperature standard ITS-90.
 °C/°F user-selective.
 Resolution 0.1°C or 0.2°F.

SPECIFICATIONS:

Polarity: Automatic, positive implied, negative polarity indication.
 Low battery indication: The "🔋" is displayed when the battery voltage drops below the operating level.
 Measurement rate: 1 times/second.
 Operating environment: 0°C to 50°C at <70% R.H.
 Storage temperature: -20°C to 60°C, 0 to 80% R.H. with battery removed from meter.
 Accuracy: Stated accuracy at 23°C±5°C, <75% R.H.
 Battery: 1.5Vx4pcs AAA size.
 Dimensions: 160mm(H) x 83mm(W) x 38mm(D).
 Weight: approx. 255g including batteries.

TEMPERATURE

RTD: Pt385(100Ω), Pt3916/Pt3926(100Ω)
 Range:
 Pt385(100Ω): -200°C to 800°C, (-328°F to 1472°F)
 Pt3916/Pt3926(100Ω): -200°C to 630°C
 (-328°F to 1166°F)

Accuracy:
 ±(0.05%rdg + 0.2°C) on °C scale
 ±(0.05%rdg + 0.4°F) on °F scale